

Positive selection on genes interacting with SARS-Cov2, comparison of different analysis

Marie Cariou

janvier 2021

Contents

1	Data	2
2	Comparison Bats	2
2.1	Cooper-bats results VS DGINN-bats results	2
2.2	Cooper-bats VS Hawkins-bats and DGINN-bats VS Hawkins-bats	3
3	Overlap	3
3.1	Data	3
3.2	Mondrian	4
3.3	subsetR	6

1 Data

Analysis were formatted by the script covid_comp_script0_table.Rnw.

```
workdir<-"/home/adminmarie/Documents/CIRI_BIBS_projects/2020_05_Etienne_covid/"

tab<-read.delim(paste0(workdir,
  "covid_comp/covid_comp_complete.txt"), h=T, sep="\t")
dim(tab)

## [1] 333 161
```


2 Comparison Bats

2.1 Cooper-bats results VS DGINN-bats results

```
plot(tab$cooper.batsAverage_dNdS, as.numeric(as.character(tab$bats_omegaM0codeml)),
  xlab="Omega Cooper-bats", ylab="Omega DGINN-bats")

## Warning in xy.coords(x, y, xlabel, ylabel, log): NAs introduits
lors de la conversion automatique

abline(0,1)
```

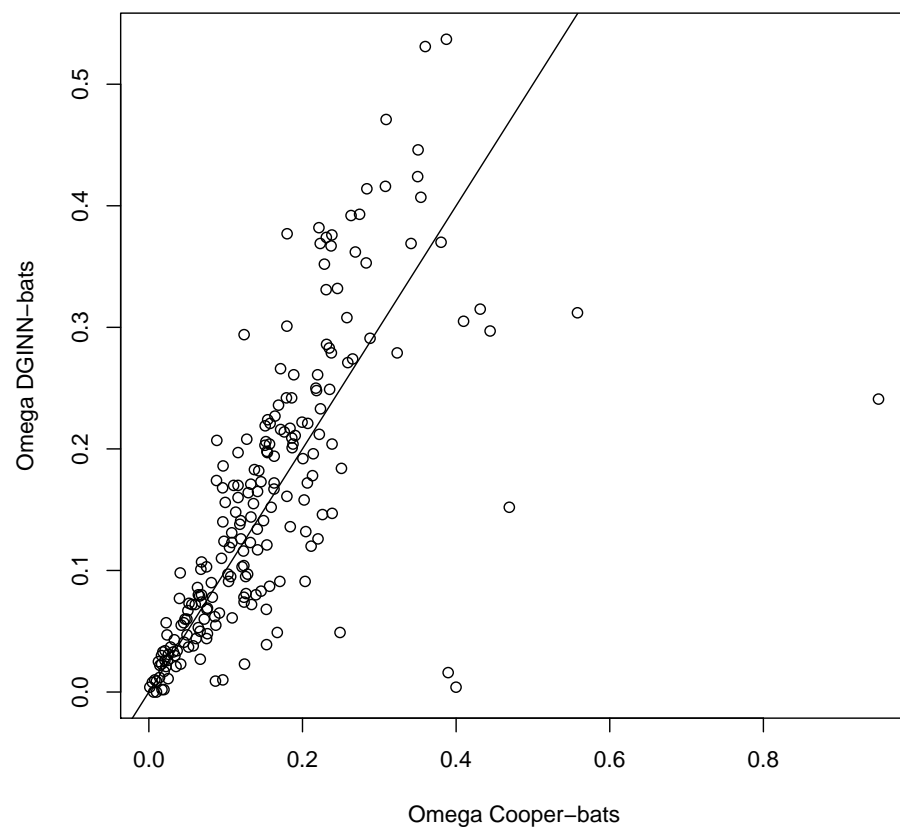

2.2 Cooper-bats VS Hawkins-bats and DGINN-bats VS Hawkins-bats

I don't think we have the omega values

3 Overlap

3.1 Data

```
tmp<-na.omit(tab[,c("Gene.name", "bats_codemlM7M8.p.value", "hawkins_Positive.Selecti
```

```
tmp$bats_codemlM7M8.p.value<-as.numeric(as.character(tmp$bats_codemlM7M8.p.value))

## Warning:  NAs introduits lors de la conversion automatique

dim(tmp)

## [1] 174  9
```

174 genes (present in the 3 experiments)


3.2 Mondrian

```
library(Mondrian)


monddata<-as.data.frame(tmp$Gene.name)
monddata$bats_hawkins<-ifelse(tmp$hawkins_Positive.Selection..M8vM8a.p.value<0.05, 1,
monddata$bats_cooper<-ifelse(tmp$cooper.batsM7.M8_p_value<0.05, 1, 0)

dginntmp<-rowSums(cbind(tmp$bats_codemlM1M2=="Y", tmp$bats_codemlM7M8=="Y",
tmp$bats_BppM1M2=="Y", tmp$bats_BppM7M8=="Y", tmp$bats_BUSTED=="Y"))

monddata$bats_dginn<-ifelse(dginntmp>=3, 1,0)
mondrian(monddata[,2:4], labels=c("DGINN >=3", "hawkins", "Cooper"))
```

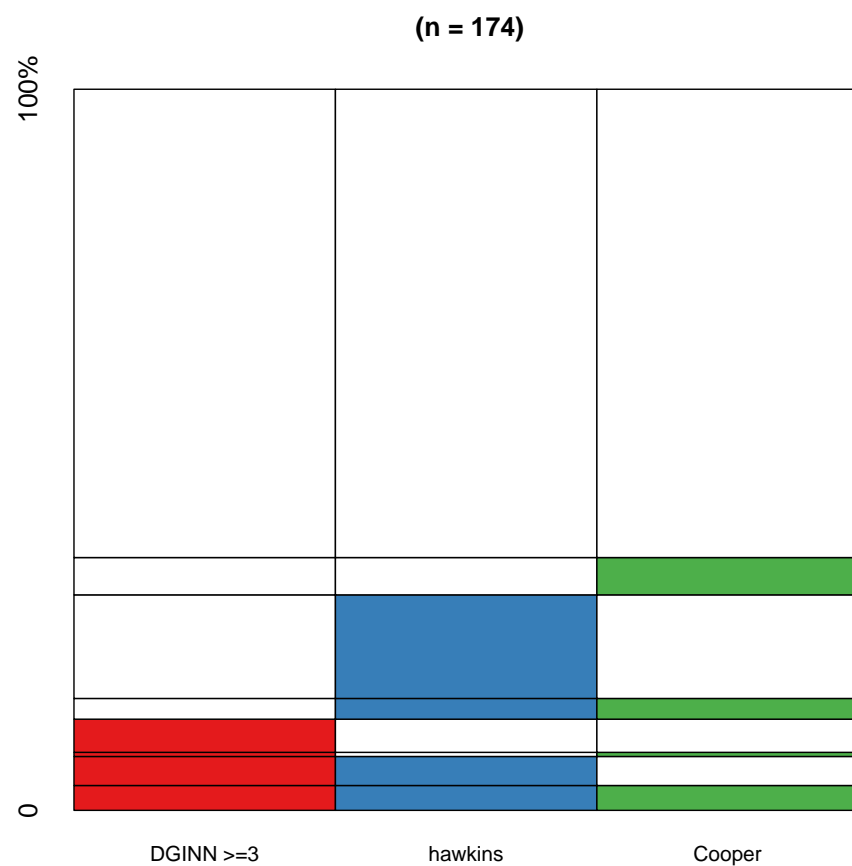

```
monddata$bats_dginn<-ifelse(dginntmp>=4, 1,0)
mondrian(monddata[,2:4], labels=c("DGINN >=4", "hawkins", "Cooper"))
```

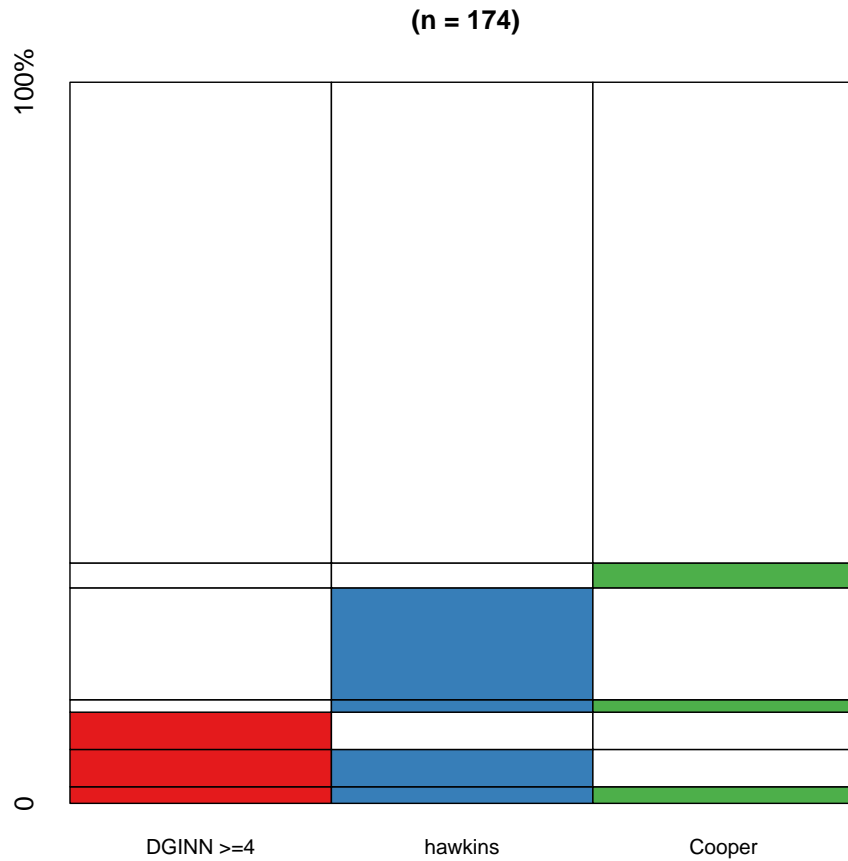

3.3 subsetR


```
library(UpSetR)
upsetdata<-as.data.frame(tmp$Gene.name)

upsetdata$bats_hawkins<-ifelse(tmp$hawkins_Positive.Selection..M8vM8a.p.value<0.05, 1, 0)
upsetdata$bats_cooper<-ifelse(tmp$cooper.batsM7.M8_p_value<0.05, 1, 0)

upsetdata$bats_dginn<-ifelse(dginn tmp>=3, 1,0)

upset(upsetdata, nsets = 3, matrix.color = "#DC267F",
```

```
main.bar.color = "#648FFF", sets.bar.color = "#FE6100")
```

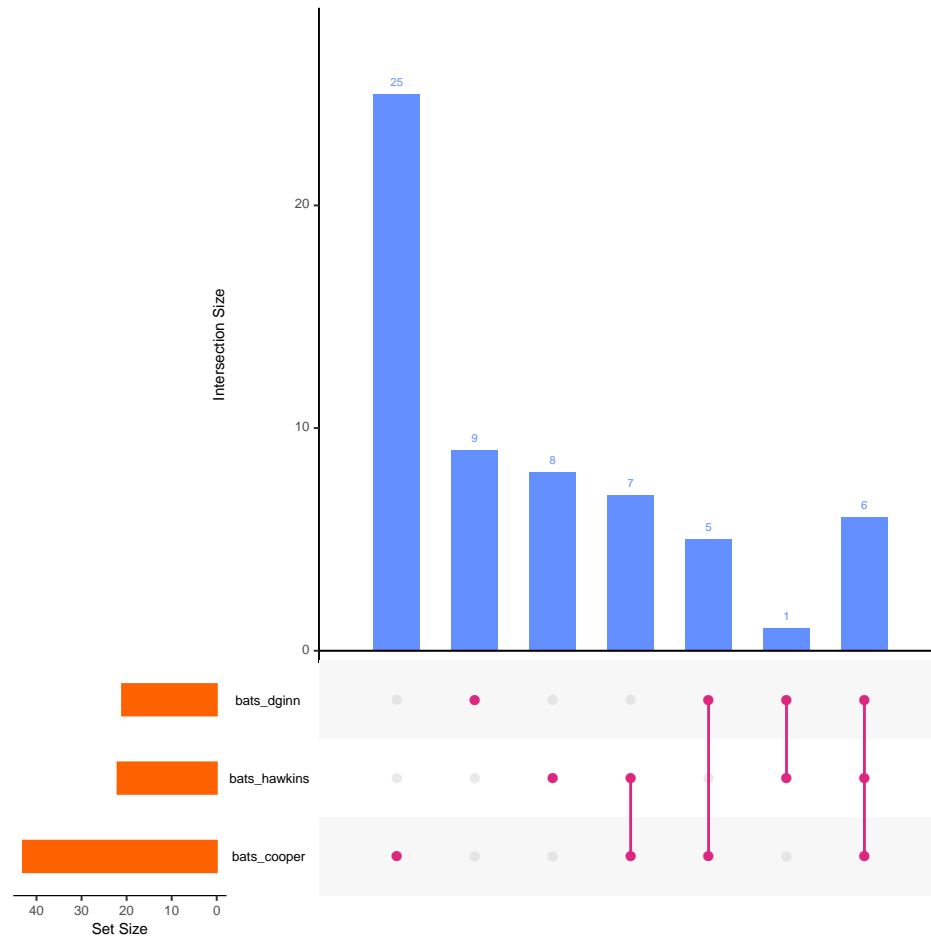

```
upsetdata$bats_dginn<-ifelse(dginnntp>=4, 1,0)

upset(upsetdata, nsets = 3, matrix.color = "#DC267F",
main.bar.color = "#648FFF", sets.bar.color = "#FE6100")
```

